



Asus Eee PC 1215N Keyboard Replacement

Keyboard removal / installation.

Written By: Gaetan





TOOLS:

- [Anti-Static Wrist Strap](#) (1)
 - [Phillips #00 Screwdriver](#) (1)
 - [iFixit Opening Tools](#) (1)
 - [Spudger](#) (1)
-

Step 1 — Battery






- Turn the power off and turn the netbook upside down.
- Slide both battery catches together to release the battery.
- Slide the battery out.

Step 2 — Battery Compartment Screws




- Remove screws on the battery compartment.

Step 3 — RAM

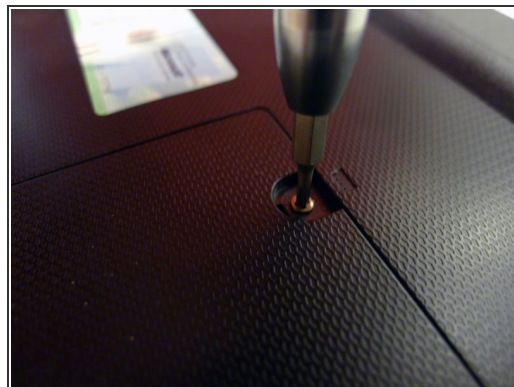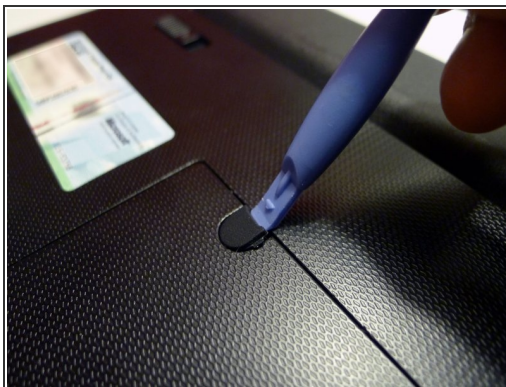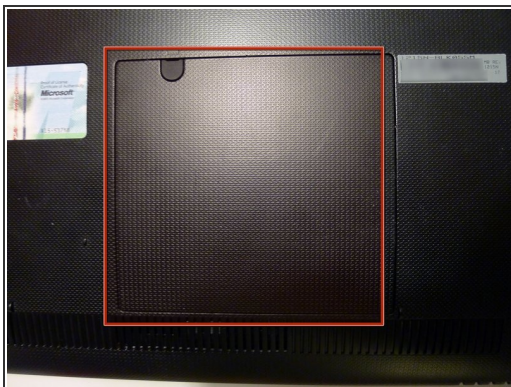


- Locate the memory compartment.
- Using a [Plastic Opening Tools](#), remove the screw rubber cover.
- Remove the screw.

Step 4

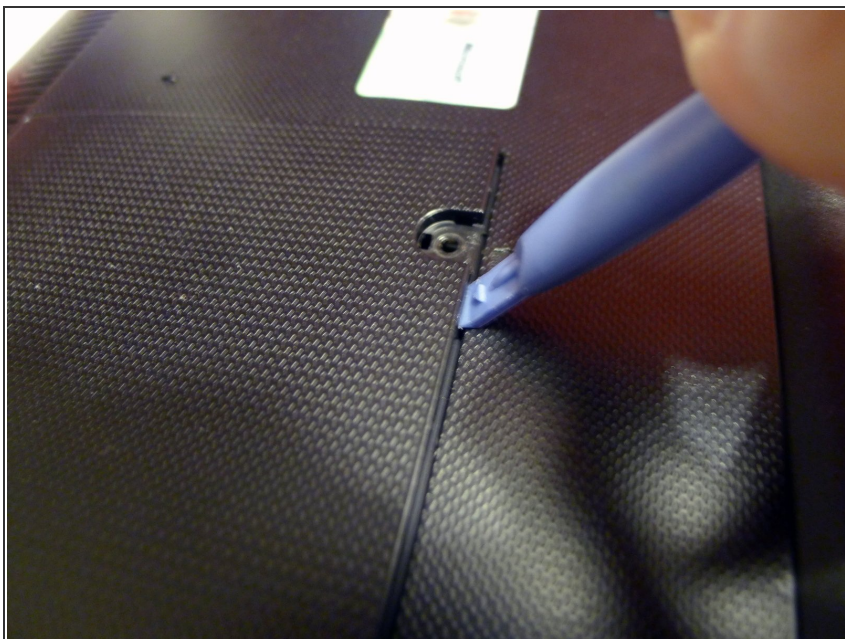


- Use a [Plastic Opening Tools](#) near the screw hole to release the cover.
- Remove the cover

Step 5

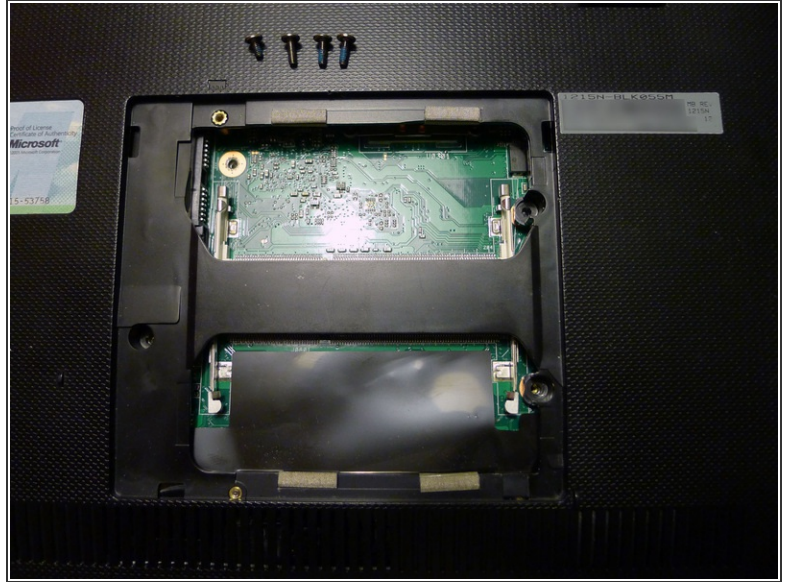

- Using a [Spudger](#), push both right and left metal clip to release one of the RAM module.
- Slide out the RAM module.
- Do the same with the second RAM module if necessary.

Step 6 — Top Cover (Touchpad)

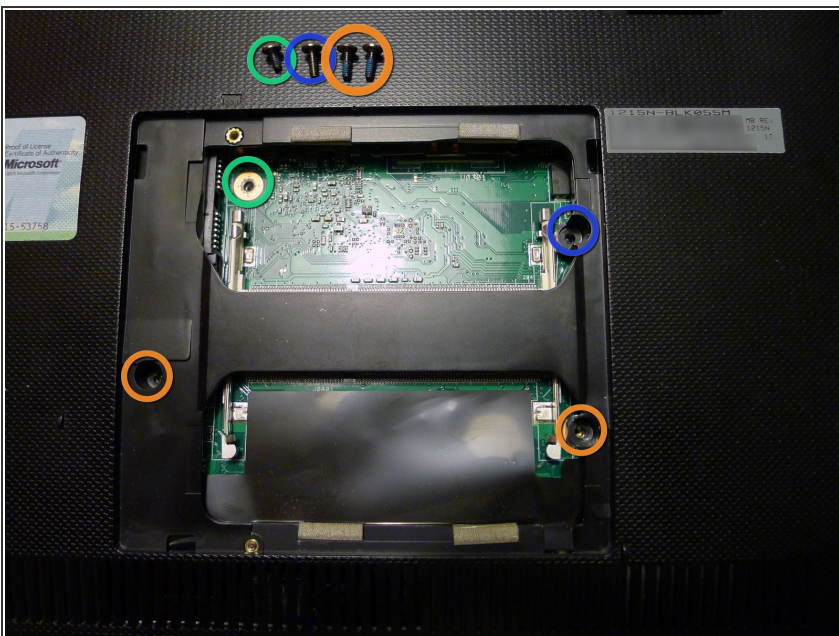

- Remove the screws as necessary.
 - For top cover removing, only remove the 2 bottom screws.
 - ⓘ For Keyboard removing, remove all 4 screws.
 - The one short screw patterns to upper left screw hole directly on the PCB.


Step 7



- Use a [Plastic Opening Tools](#) to release the top cover.
 - Start from the left side.
 - Go around on the bottom
 - Finish with the right side.



⚠ The top cover is still connected to the PCB with the touchpad ribbon. Handle it carefully.

Step 8

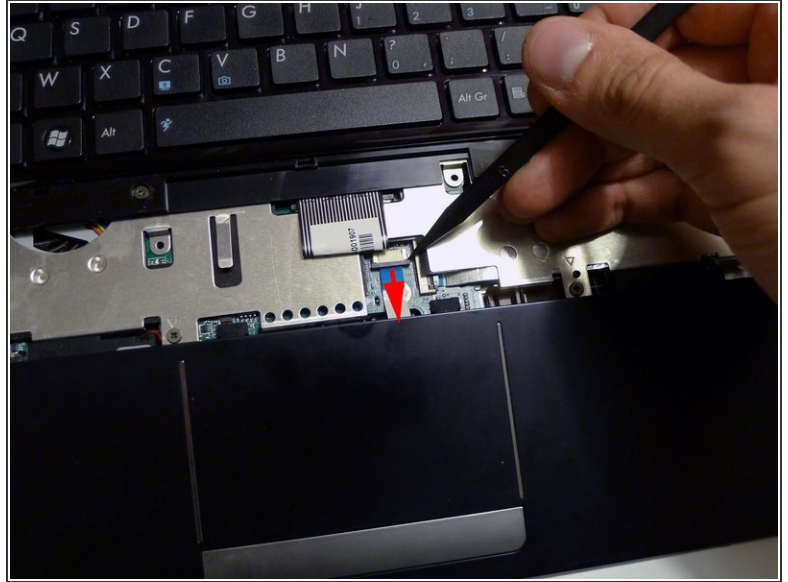


- Carefully slide the top cover to the bottom in order to see the touchpad connector on the PCB.
- Use a [Spudger](#) to slide the connector attachment black part and release the ribbon from the PCB.
- Now you can remove the top cover

Step 9 — Keyboard

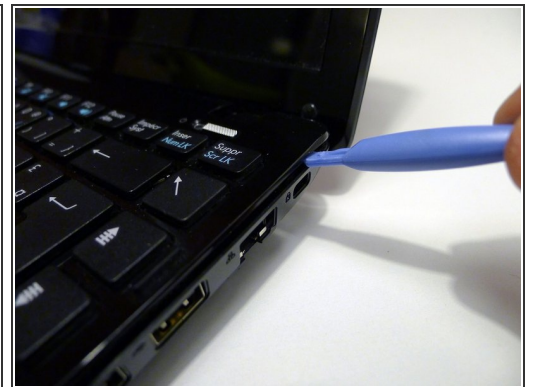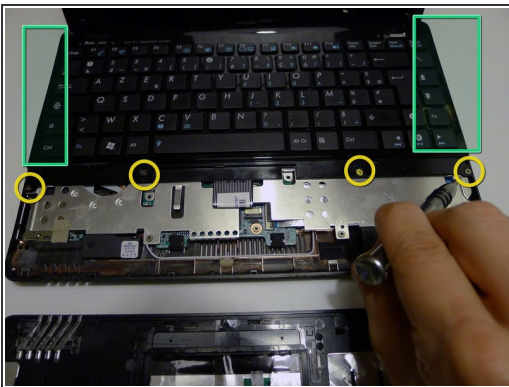

- ⚠ Make sure that the two upper screws inside the RAM compartment are removed before to continue. (Refer to Step 5).
- Remove the keyboard 4 screws on the bottom.
- Use a [Plastic Opening Tools](#) to release the keyboard clips on the left and right side.

Step 10

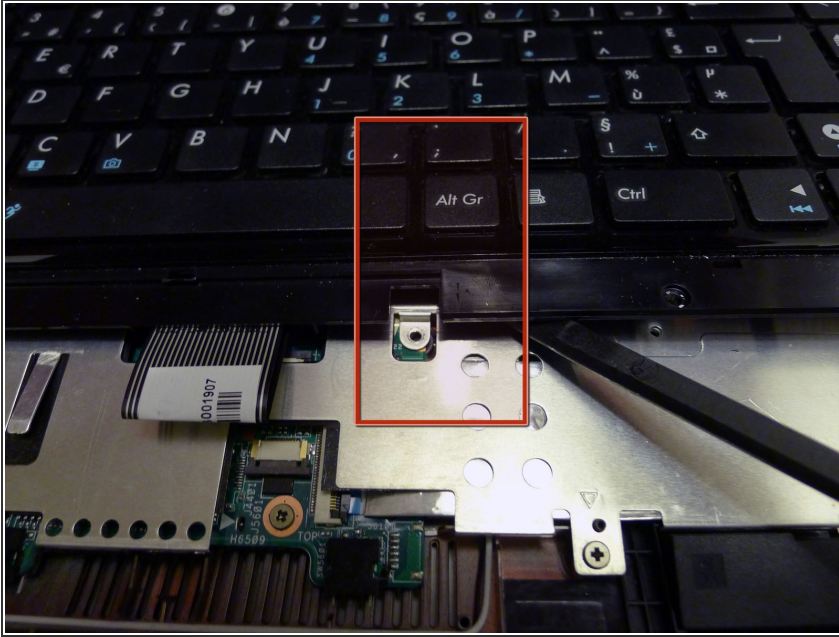


ⓘ At this step, the keyboard is still maintained with double-sided tape between the keyboard underside and the metallic PCB protector.

- Carefully slide a [Spudger](#) between the keyboard underside and the metallic PCB protector near the center/right at the bottom. Use the spudger as a lever to release the keyboard from the metallic PCB protector.

⚠ The keyboard is still connected to the PCB with a ribbon. Handle it carefully.

Step 11

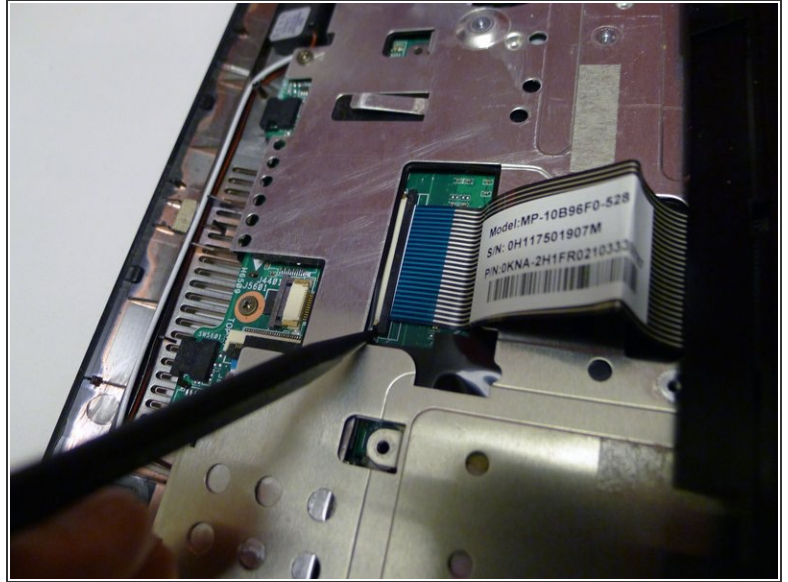

- Carefully slide the keyboard to the top in order to see the ribbon connector on the PCB.
- Use a [Spudger](#) to slide the connector attachment black part and release the ribbon from the PCB.
- Now you can remove the keyboard.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-16 04:10:08 PM.